

Backup Value SOHO Series

Value600ELCD/800ELCD/1000ELCD

VSD0012EU-01

Best Protection for Home Entertainment and SOHO Networks

CyberPower[®]
Reliability. Quality. Value.

Featuring with surge protected RJ11/RJ45 port, the Value SOHO Series UPS is ideal for home entertainment systems and SOHO networks with its full protection against surge/spikes and power abnormalities. The Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains safe voltage for the connected equipment without resorting to battery power. With the multifunction LCD provides push-of-a-button review of power conditions, it allows immediate access to precise information of critical power/battery condition.

The included PowerPanel[®] Personal Edition management software showcases the feature rich abilities such as input/output power voltage readings, self-diagnostics, and approximate battery backup time.





Applications

- Home and Home Office
- Home Theater System
- Small Office

Series Features

- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- PowerPanel[®] Personal Edition Software

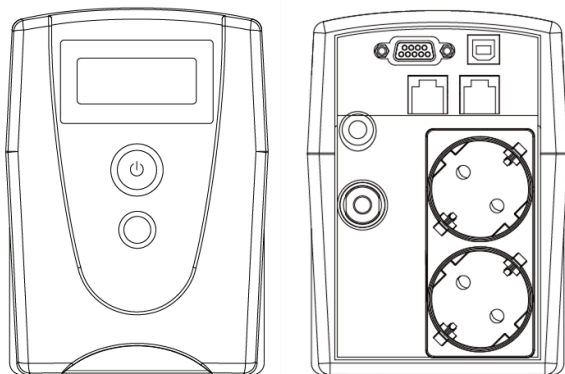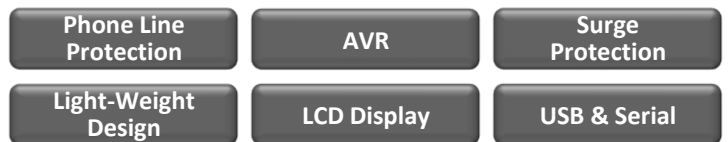

Front

Back

PowerPanel[®] Personal Edition Management S/W



AUTO-SHUTDOWN SOFTWARE
CyberPower PowerPanel[®] Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

**Software functions may vary due to firmware version and/or hardware constraints.*

Backup Value SOHO Series

Value600ELCD/800ELCD/1000ELCD



Technical Specification


Model	Value600ELCD	Value800ELCD	Value1000ELCD
Configuration			
Capacity (VA / Watts)	600 / 360	800 / 480	1000 / 550
Energy-Saving Technology	N/A		
Input			
Frequency Range	47 Hz - 63 Hz (Auto Sensing)		
Input Plug Type	Schuko		
Output			
UPS Outlets (Numbers)	(2) Schuko		
On Battery Output Voltage	Simulated Sinewave at 230 Vac +/- 5%		
On Battery Output Frequency	50 Hz/60 Hz +/- 1%		
Transfer Time (Typical)	8ms		
Overload Protection	On Utility: Fuse & Internal Current Limiting On Battery: Internal Current Limiting		
AVR	Boost & Buck		
Surge Protection and Filtering			
Surge Protection	Yes		
Physical			
Dimensions (H x W x D) (mm)	140 x 100 x 300		
Weight (kg)	4.8	5.4	5.8
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 7AH x 1	12V / 9AH x 1	
Typical Recharge Time	8 Hours		
Runtimes			
Half-load / Full-load (mins)	9'30" / 1'30"	8'30" / 1'30"	6'30" / 1'00"
Status Indicators			
Indicators	Power On, Using Battery		
Audible Alarms	On Battery, Low Battery, Overload		
Multi-functional LCD Readout	Yes		
Communication			
PowerPanel® Personal Edition	Windows 7 / Vista / XP / 2000, Server 2008 / 2003, Linux		
Management			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB, Serial		

#All specifications are subject to change without notice. ©2012 Cyber Power Systems. All Trademarks are the property of their owners.

Packaging Content:



Product Unit



USB Cable



User Manual



Software Download Card



DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2000,
ISO 14000, and
QC080000
Approved