


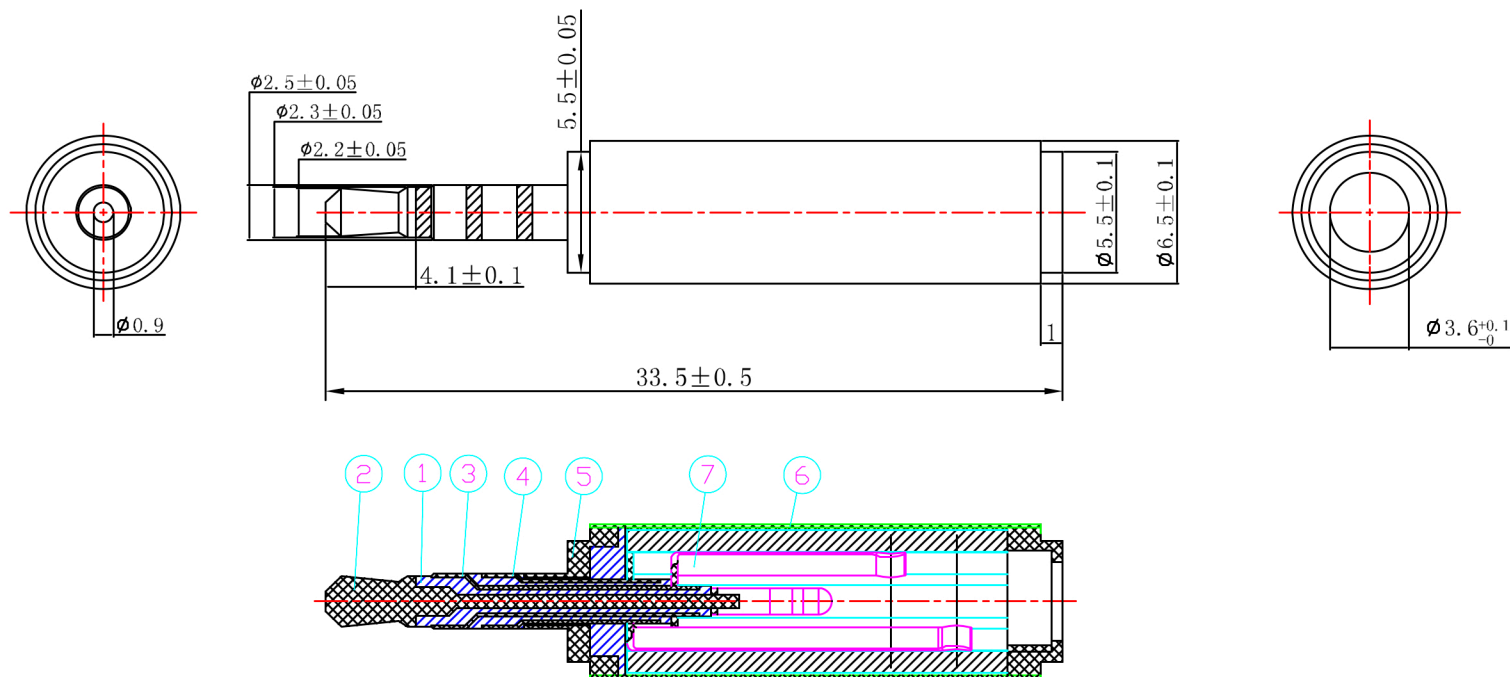

NOTE:

Electronic Test(Electrical Performance):

100% Open & Short & Mis-wire Test

Contact impedance: 30M OHM Max.

Insulation Resistance: 100M OHMS Min.

Withstand voltage: AC 500V/1MIN

⑦	shrapnel	C5191	Ni 2-5um/Au 1u''
⑥	Outside the tube	C3604	Ni 2-5um/Au 1u''
⑤	Four sections of pipe	C3604	Ni 2-5um/Au 1u''
④	Three sections of pipe	H655	Ni 2-5um/Au 1u''
③	Second section of the pipe	H655	Ni 2-5um/Au 1u''
②	The positive needle	C3604	Ni 2-5um/Au 1u''
①	PLASTIC	POM	BLACK
NO.	Part	MATERIAL	PLATING

		TOLERANCE INCHES M/M		BUY ON www.cablematic.com				
. X	. 015	. 30	Model name: 2.5 Male TO 3.5 Female Adapter					
. XX	. 010	. 10						
. XXX	. 005	. 05						
Drawn by	WJ		Scale	NONE	Model: AD254354	REV. A		
Check by			Unit	MM	Drawing no:			
Appd by			Date	2017. 03. 22	Customer P/N:	1/1		