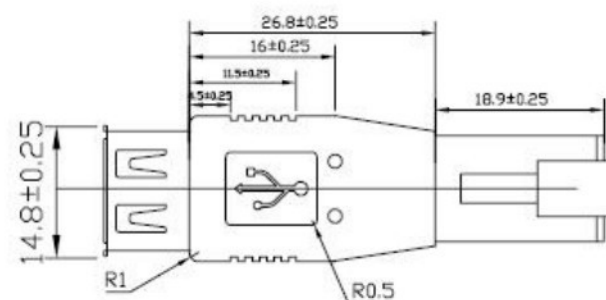



ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.INSULATION RESISTANCE:5MΩ
- 3.CONTACT RESISTANCE:10Ω
- 4.HI-POT:300V DTAGE.

PIN ASSIGNMENT

USB-A FEMALE

1 2 3 4

RJ458P8C PLUG

1 2 3 6

4	RJ45 8P8C PLUG CONTACT PLATED: GOLD FLASH	PCS	1
3	INTERNAL WIRES: UL1007 30AWG	PCS	5
2	PVC MOLDED COLOR: BLACK		
1	USB-A TYPE FEMALE WHITE PASTER CONTACT PLATED: G/F SHELL NICKEL	PCS	1
NO.	DESCRIPTION	UNIT	QT'Y
A	USB-A FEMALE/RJ45 PLUG MOLDED ADAPTER		08/11/25
REV.	DESCRIPTION	DATE	

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	1:1	UNIT:	mm
DRAWN	YIXIAOYANG	08/11/25	DRAWN NAME:
CHECKED	/	/	競捷-CT52
APPROVED	/	/	PRODUCT NO.
			ADP-USB-AFRJ45M
			FILE NAME:
			ADP-USB-AFRJ45M