
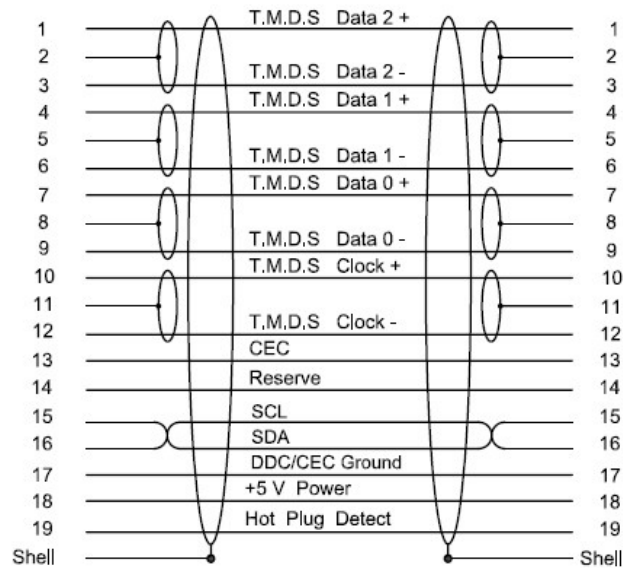


**HANK SIZE**

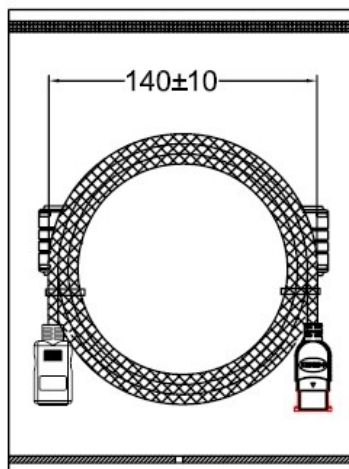

**ELECTRIC TESTING:**

1. INSULATION RESISTANCE:  $\geq 20 \text{ M}\Omega$
2. CONDUCTOR RESISTANCE:  $\leq 5 \Omega$
3. VOLTAGE: 300V DC

6	High Definition Multimedia Interface Cable, UL20276,80 degC, 30V, VW-1, with OD.:5.5 Black PVC Jacket+ Black PET Braid(HDMI 1.3 CABLE 30AWG C18-27011)
5	PVC - Black(M01-012-050)
4	Ferrite Core RH:12*20*7.3(FC1-0025-00/YT-0049)
3	Plastic Cap-Transparent(OPT-110-024)
2	HDMI Jack - Gold Plated(J37-0109G/YT-1274)
1	HDMI Plug - Gold Plated (P37-0027G-00/YT-1362)
NO.	DESCRIPTION

CUSTOMER: <b>CDM</b>	DATE	DRAWN	CHECKED	APPROVAL	PRODUCT: HDMI PLUG TO HDMI JACK	PART No. :
	08/08/25	zhm				
DOC No. :	UNIT: mm	SCALE: NO	REV: A			