


Cat.5e RJ-45 Flush mount wall plate (FTP) / Dual Type

Label : PC

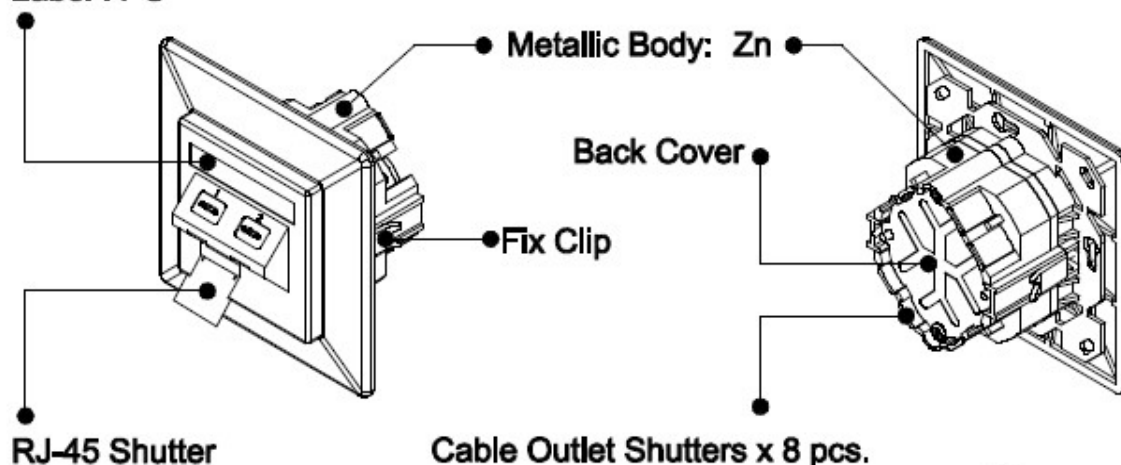

Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

Materials:

Plastic Plate : Fireproof ABS UL-94V0

Plastic Label : PC

Metallic Body: Zn

Back Cover: Metal (SPCC) & Zn plated

Fix Clip : Metal (SPCC) & Zn plated

Cable Outlet Shutters : stainless steel (SUS.)

RJ-45 Jack : STP 8P8C 50 micro inches gold plated

PCB : FR-4 / 1.6mm UL-94V0

IDC Body : Fireproof ABS UL-94V0

IDC Pin : Bronze & Tinned

Label Color Code: T568 A/B

IDC Description: For 22-26 AWG.

For 110 or Krone punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:


IDC Punch Down Cycle : Over 25 Cycles (min.)

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature :

-40 ~ +70 degree / C

Dimensions:

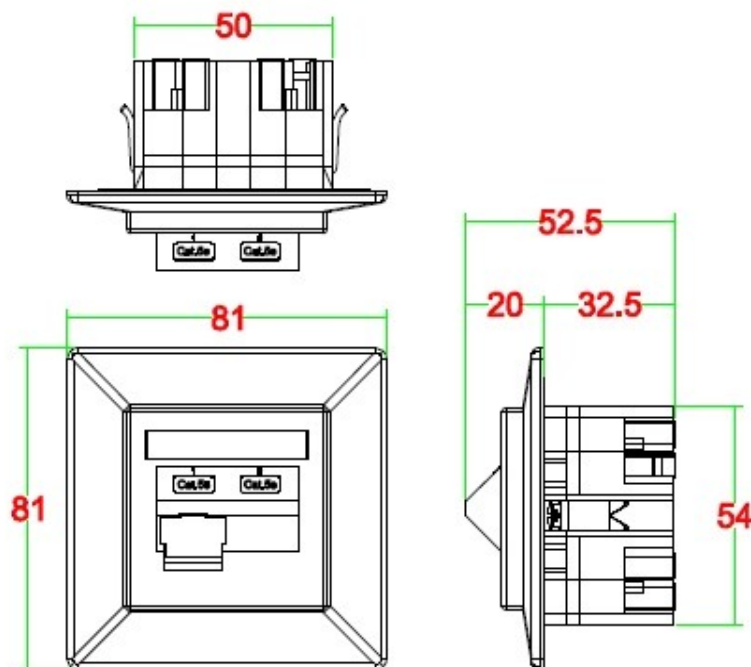

Color coding Information

T568B:

- 1— WH/OR
- 2— OR
- 3— WH/GN
- 4— BL
- 5— WH/BL
- 6— GN
- 7— WH/BR
- 8— BR

T568A:

- 1— WH/GN
- 2— GN
- 3— WH/OR
- 4— BL
- 5— WH/BL
- 6— OR
- 7— WH/BR
- 8— BR

DRAW NO:		ITEM NO:	EGA-F1XX
	APPR	CUSTOMER:	
UNIT: m/m	CHECK	DATE:	
SCALE:	DESIGN	TOLERANCE:	± 1 · X ± 0.1 · XX ± 0.15