


WEIGHT:	CUSTOMER NO.:	REMARK

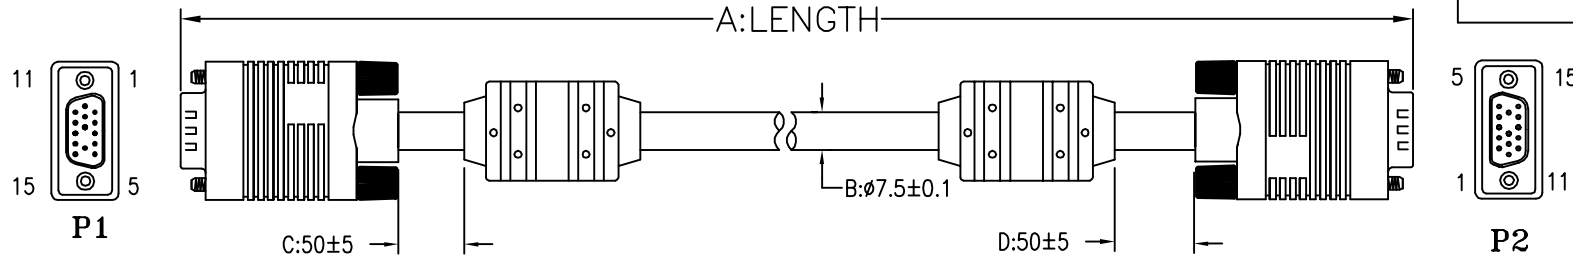


MONITOR CABLE
HDB15M TO HDB15M xxM
 PART NO.: W1SBK1MMxx


RoHS COMPLIANT 6 934808 86xxx*

50

90

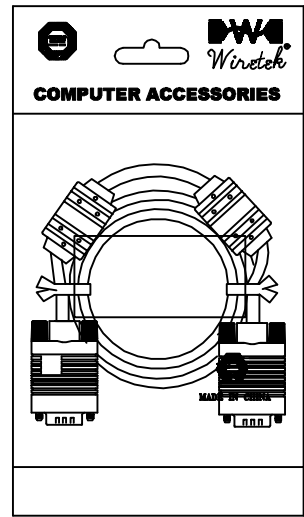

PINOUT DIAGRAM:

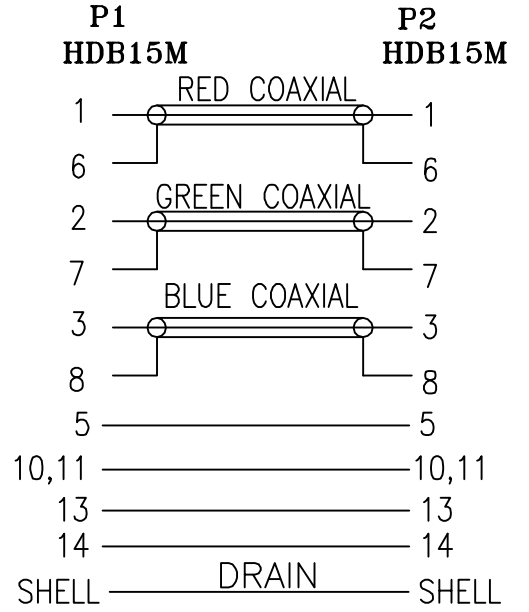

- NOTE:**
- 1) DIE NO: OH15111 (1 OUT OF 2, 1 SET)
 - 2) FULLY COPPER FOIL SHIELD 360°.
 - 3) CORE WIRE COLOR: STANDARD COLOR.
 - 4) PRIMARY DIMENSION: A,C,D

3	OUTER JACKET PVC 45Pa BLACK(1101)(RoHS)
2	HDB15M BLUE SOLDER TYPE TERMINAL GOLD FLASH W/O 9 PIN (RoHS)
1	UL2919 (28#1C+S+MY)*3+28#4C+A+B(64AM)+D BLACK(1101) OD: 7.5MM xxxxMM (RoHS)

A	FIRST EDITION	Chenlk	09/05/08
REV. ECR	DESCRIPTION	C.N.	DATE
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>		TITLE MONITOR CABLE	
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		CHKD.	CONF.
DIMENSIONS	TOLERANCE	DR.	APPD.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm		
80.01 TO 150.00mm	±0.15mm		
150.01mm	±0.20mm		
MATERIAL	MATERIAL	PART NO. PV13E(0.5M-15M)	
FINISH	FINISH	SCALE /	SHEET 1/2 UNIT MM SIZE A4 REV. A