cablematic

L= lenght(20CM) ± 2

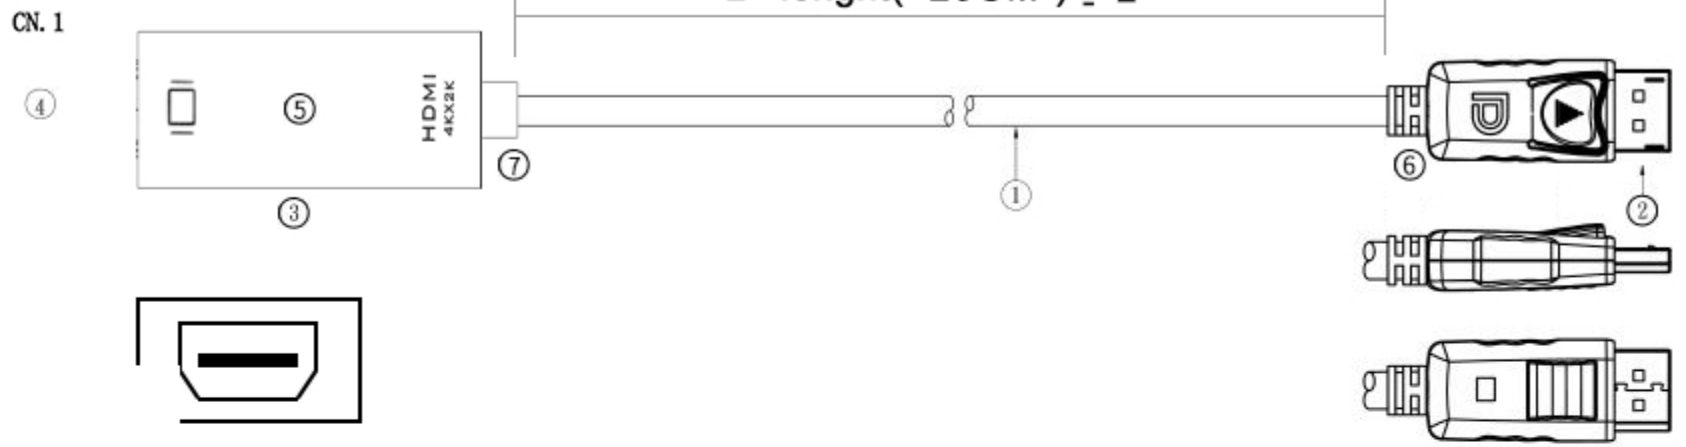

PIN ASSIGNMENT:

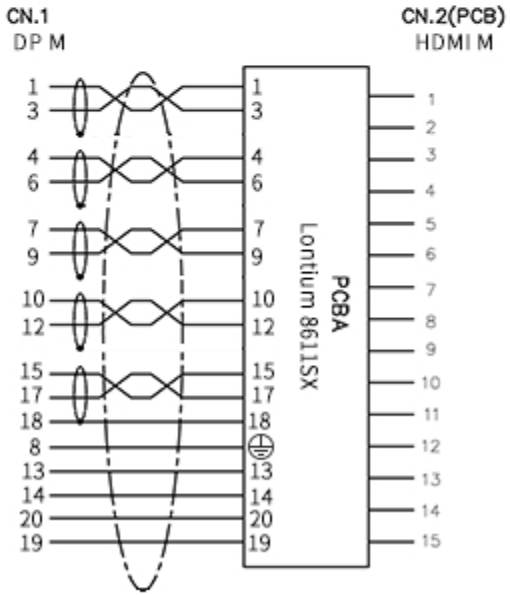

Electrical performance test ing: (DP F To HDMI F)

1.signal source resolution UXGA:3840*2160p 1920*1080p

2.refresh rate: 30HZ

3.the video is like no signal jitter,drag, shadow, Lack of color, etc.

4.test the length of both ends of the transition line 450MM/MAX.

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
7	Out Mould	45P PVC black	
6	PE	LDPE (ROHS)	
5	Housing	HDMI F by injection moulding black	
4	Housing	DP M by injection moulding black	
3	CONN	HDMI M gold connector balck shell +PCBA	
2	CONN	DP M gold connector balck plactic core	
1	CABLE	(1P*32#+AL+ML)*5+5C*32#+AL+D+B	

INNERMOLD

OVERMOLD

TOLERANCE UNSPECIFIED
±
± 0.1
± 0.38
ANGLE ±

SCALE NON

UNIT mm

DRAWN:

DESIGNER:

CHECKED:

APPROVED:

NAME

SHEET 1/1

DRAWING NO. RG-DPHDXX

REV HDMI 1.2