


Molding NO.:	
Molding	P1,P3:152
Molding	P2:180-1

Rev	Modification Content	Date	Validate
△B	the Second Edition: Color, Length and Packing	2007-08-14	Cindy


ROHS

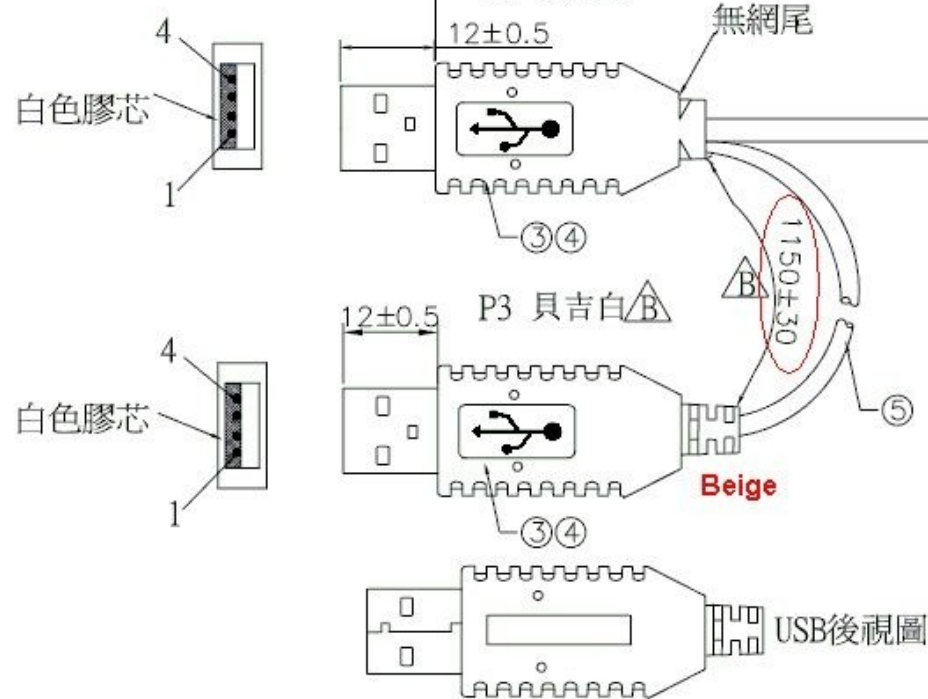

測試要求：


1. 成品需做100%電氣測試,不得有任何斷路/短路,錯位,電器閃爍.
2. 絕緣&導通阻抗:1M Ω /Min& 100Ω /Max .
3. 繞線方式請見右圖:單條包裝.50PCS/袋.貼數量標籤"50PCS"與環保標籤,用環保膠袋,膠袋上印有"04-LD"外箱兩側麥貼環保標籤.

Packing:

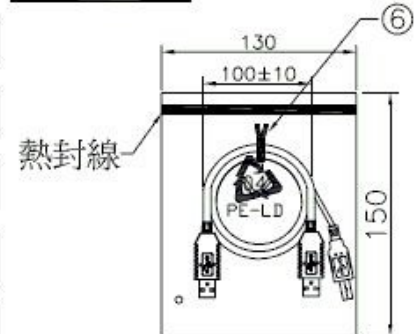

6	Tie	BLACK TIE	1 pcs
5	Cable	NOUL 22AWG(17/0.16TA*2C 過粉)*1C JACKET:PVC BLACK OD:3.5 INSULATION:RED/BLACK L:1200MM	1 pcs
4	Molding	P1,P2:50P BLACK PVC; P3:50P PVC 貝吉白-61	16 g
3	Connector	USB(A)公 (白膠芯) 鍍	2 pcs
2	Connector	USB(B)公 (白膠芯) 鍍	1 pcs
1	Cable	UL2725 (REV:2.0) 28AWG*1P+24AWG *2C+AL+D+B) BLACK OD:4.5 1P INSULATION:WHITE/GREEN 2C INSULATION:RED/BLACK L:1200MM	1 pcs
NO.	P/N	DESCRIPTION	QTY

Pin Assignment:

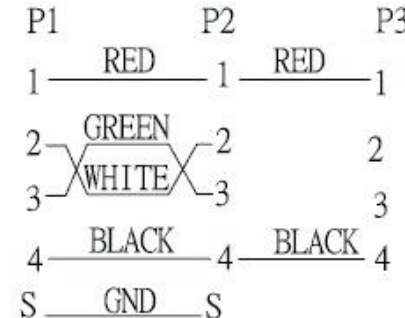

P/N	USB(A)公*2-USB(B)M L:1.2M			
Item	HJ-141-CU81			
Drawn By	Cindy	Customer NO.	NO	N
Audited By			Unit : mm	
Date	2007-08-11	Rev. : 1.00	ME	