
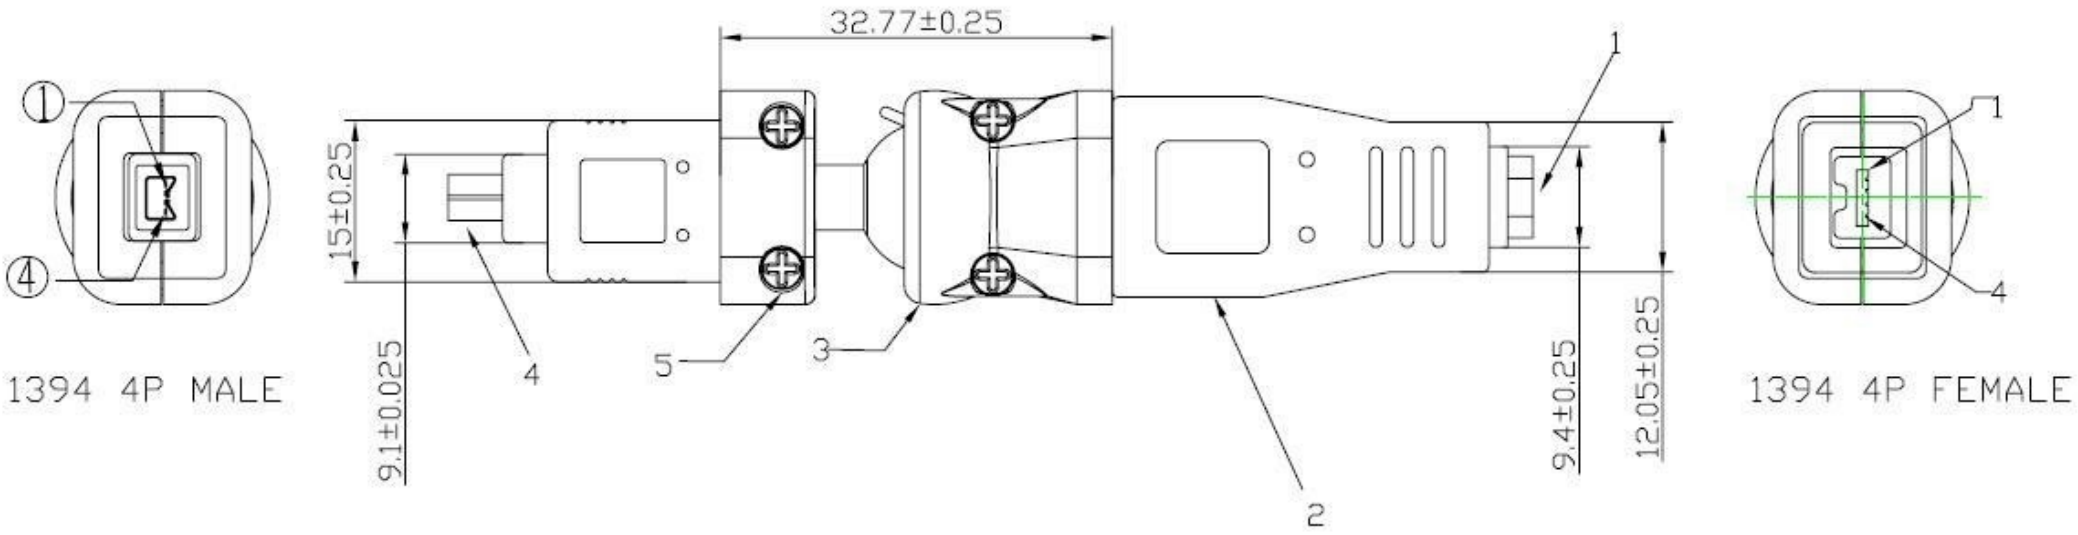


PIN ASSIGNMENT

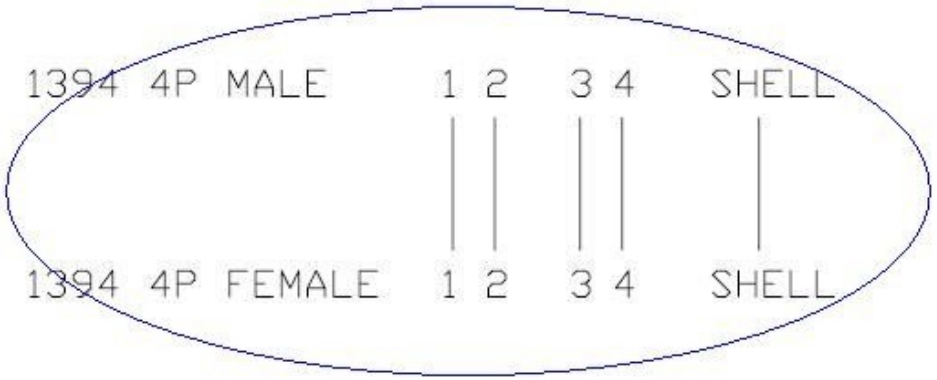

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 10ohm
3. Insulation Resistance: 5Mega ohm
4. Hi-Pot: 300V DC/10ms

NO.	DESCRIPTION	Q'TY	UNITS
5	4#40 THUMB SCREW	4	PCS
4	1394 4P MALE SOLDER MOLDED TYPE SHELL NICKEL	1	PCS
3	RETRACTABLE MADE OF ABS SHELL(RED,WHITE)	1	PCS
2	P.V.C MOLDING 55P COLOR: BLACK		
1	1394 4P FEMALE SOLDER MOLDED TYPE SHELL NICKEL	1	PCS

REV.	DESCRIPTION	DATE
A		08/10/18

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5'
0. ±0.5
.0 ±0.3
.00 ±0.2

SCALE: NONE UNIT: mm
DRAWN XIEBO 08/10/18
CHECKED
APPROVED
SIZE A4 REV. A

DRAWN NAME: 競捷-R008
PRODUCT NO.
FILE NAME: