SPECIFICATION:

- VOLTAGE RATING: 300 VAC(rms).
- CURRENT RATING: 5 Amp CONTINUOUS.
- DIELECTRIC STRENGTH: 1000 VAC.
- CONTACT RESISTANCE: 10 mΩ MAX 1 ADC.
- INSULATION RRSISTANCE: 5000 MΩ MIN.
- MATING FORCE INSERTION FORCE: 1 OZ–16 OZ
  AVERAGE 150 GRAM.
  EXTRACTION FORCE: 1 KG MIN.



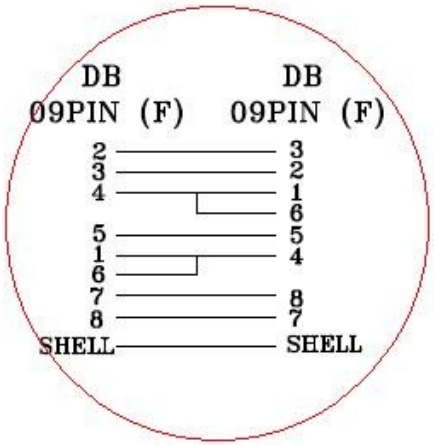

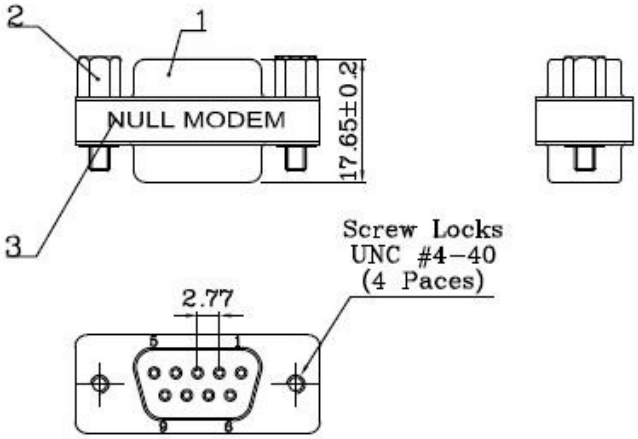

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

NM66

NO.	DATE	MODIFICATION
2		
1		

	COMPONENTS	DESCRIPTION	Q'TY
1	D09FTBBSN	D–SUB 09P Female Connector. Insulator: Blue P.B.T Shell: Steel Tin Plated Contact: Bress G/F Gold Plating	2
2	Screw Lock	Slotted Nut: UNC #4–40. Thread: UNC #4–40. Nickel Plated	4
3	Shell	Steel: Tin Plated	1
4			
5			

APPROVED BY:	DATE:
CHECKED BY:	DATE:
PART NO: T065–04283	
CUSTOMER NO:	
DESIGN BY:	DATE:
DESCRIPTION: D–SUB 09P Female To D–SUB 09P Female	PART NO:
SCALE: X:1 / UNIT: mm / VERSION: A	
DRAWN BY: CHEN Aug.09.2008	DRAWING NO: 04283

From: 900628