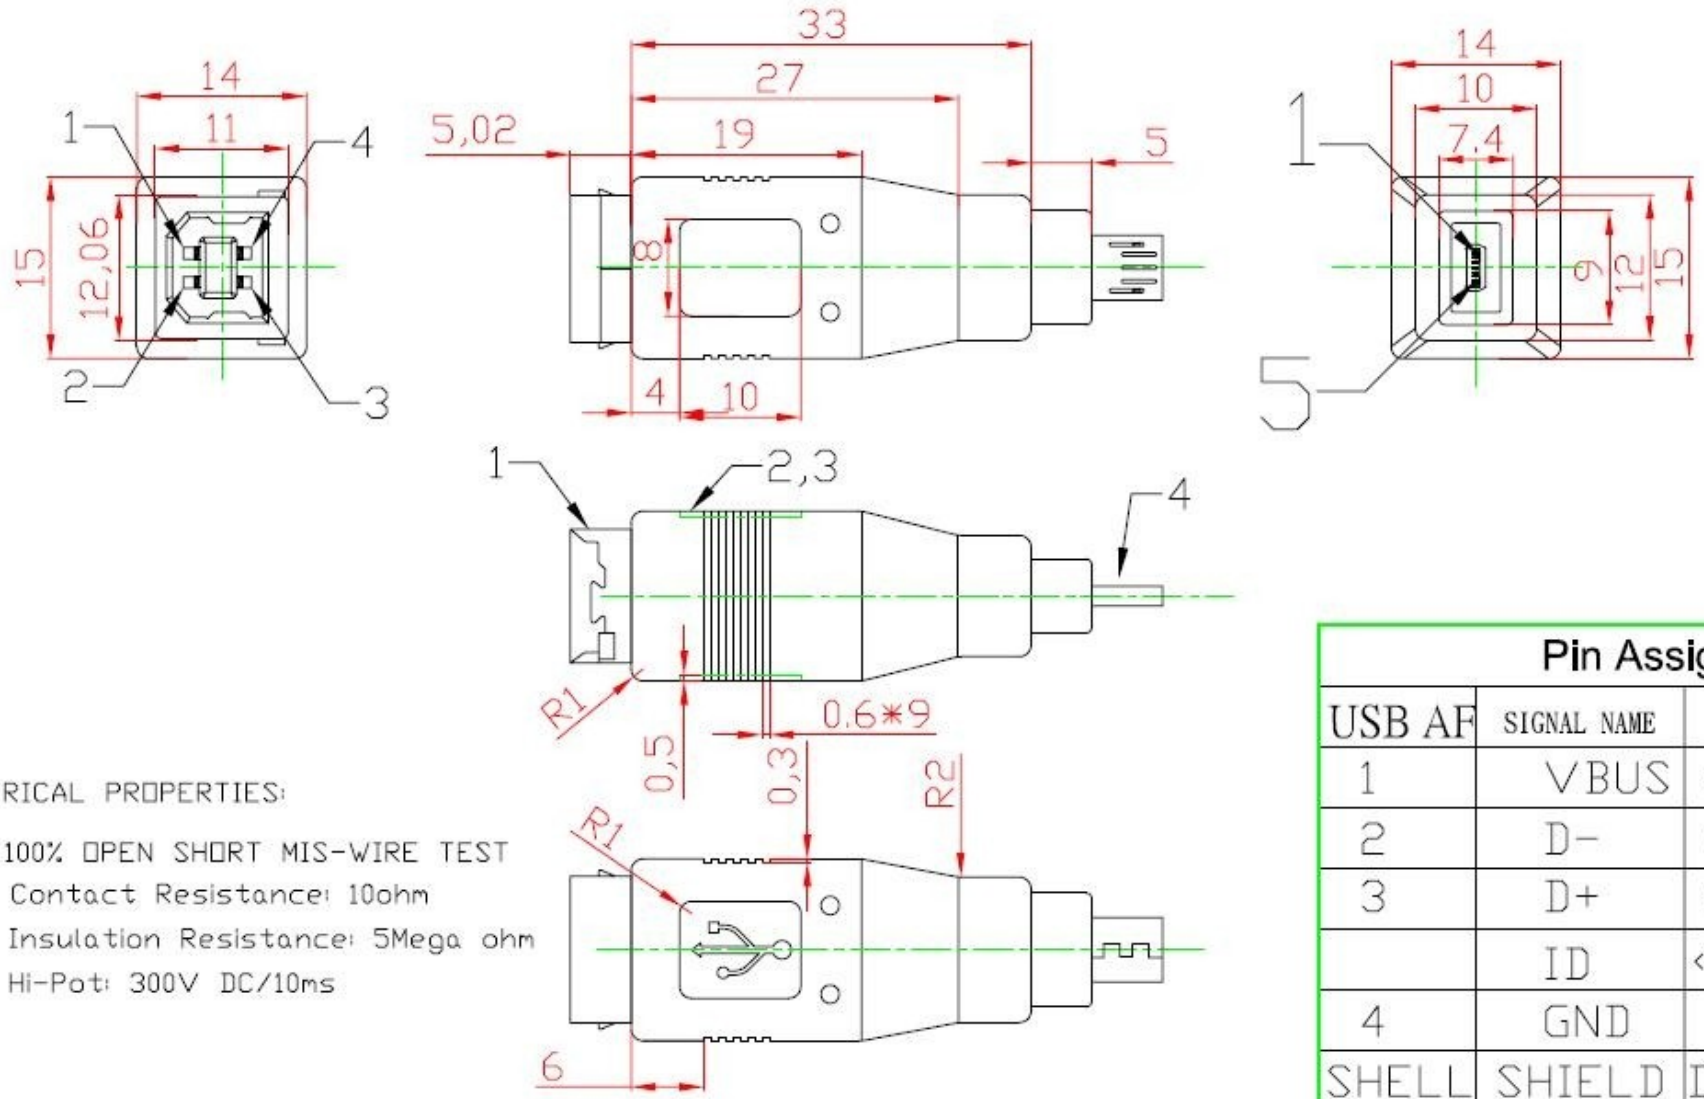

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 10ohm
3. Insulation Resistance: 5Mega ohm
4. Hi-Pot: 300V DC/10ms

Pin Assignment

USB AF	SIGNAL NAME	COLOR	MICRO USB B
1	VBUS	RED	1
2	D-	WHITE	2
3	D+	GREEN	3
	ID	<RA_PLUG_ID	4
4	GND	BLACK	5
SHELL	SHIELD	DRIAN	SHELL

NO.	DESCRIPTION	UNIT	QT'Y
4	MICRO USB B TYPE MALE SHELL PLATED:NICKEL CONTACT:G/F	PCS	1
3	INTERNAL WIRES: UL1007 30AWG	PCS	5
2	PVC MOLDED COLOR: BLACK		
1	USB-B TYPE FEMALE SHELL PLATED:NICKEL CONTACT PLATED: G/F	PCS	1

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5°
0. ±0.5
.0 ±0.3
.00 ±0.2

SCALE: 1:1 UNIT: mm

DRAWN Xing Fa 07/10/30 DRAWN NAME:

CHECKED ERIC 07/10/30 競捷-US93

APPROVED PRODUCT NO.

SIZE A4 REV. A FILE NAME:

REV.	DESCRIPTION	DATE
A		07/10/30