BUY ON
www.cablematic.com

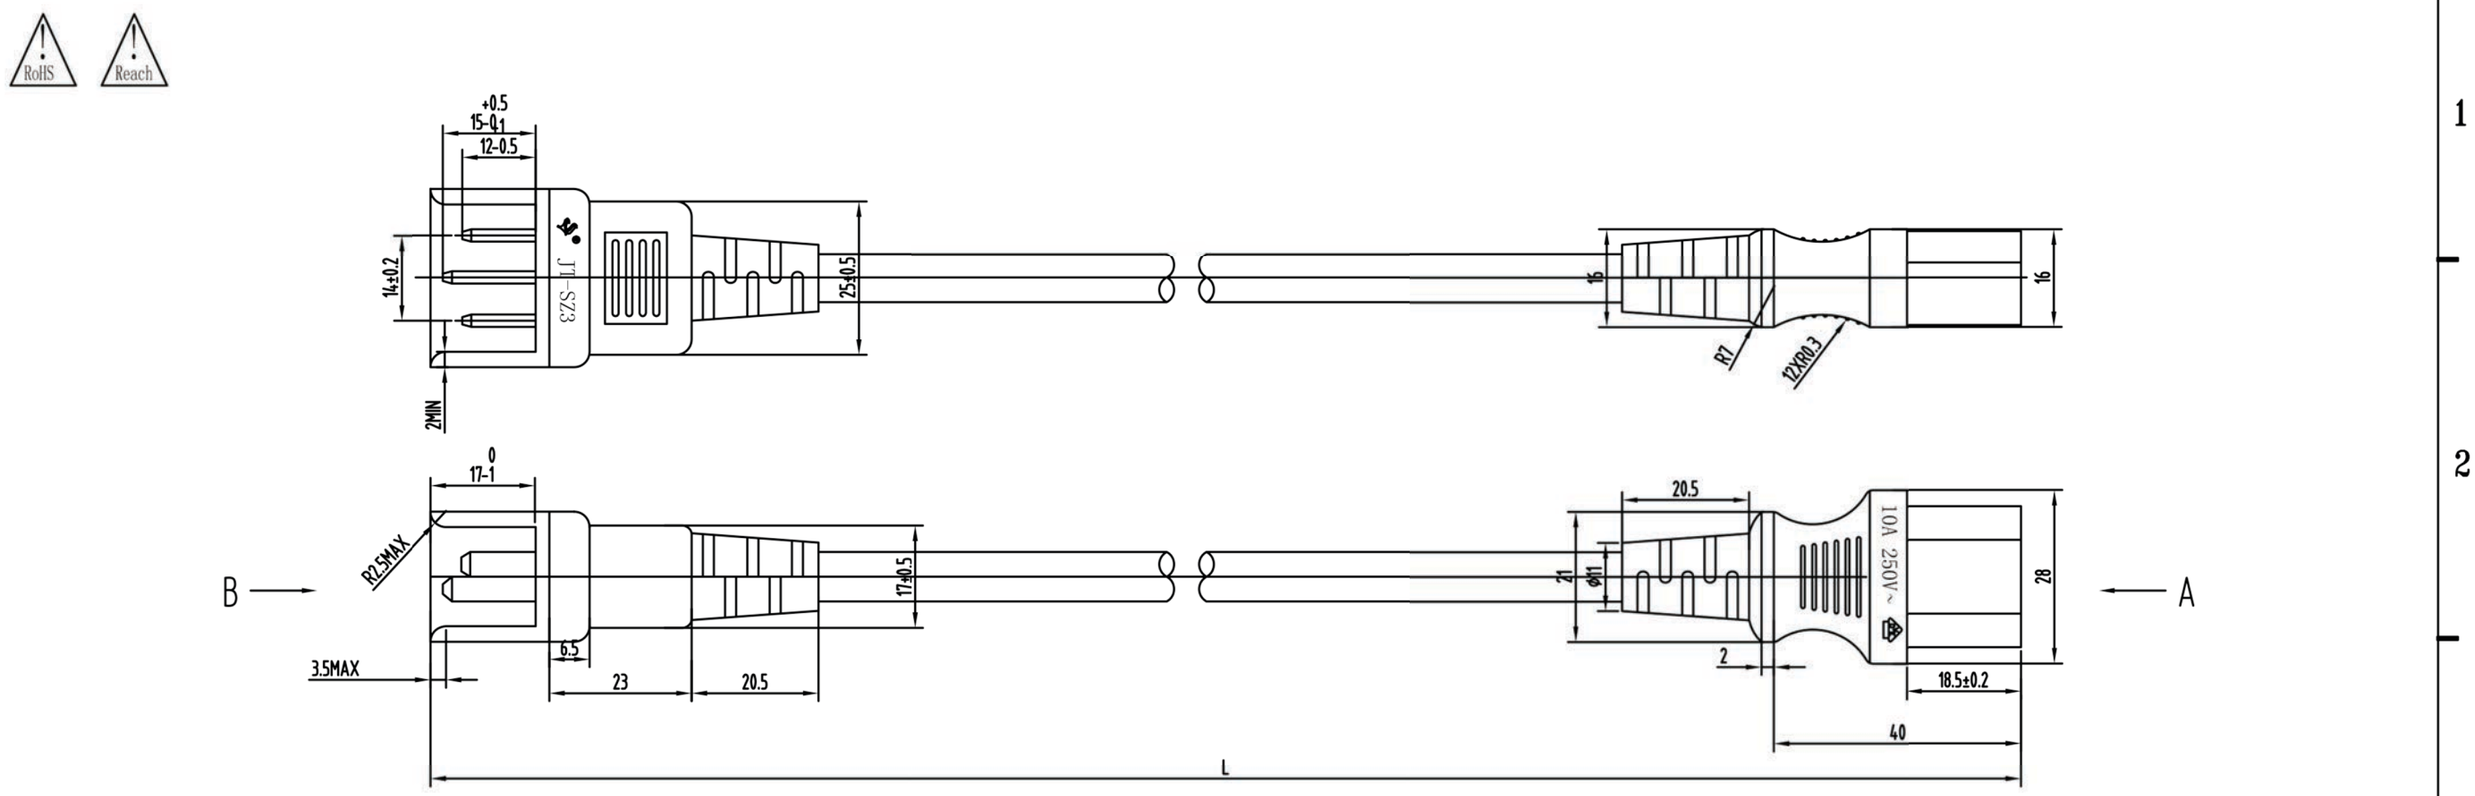

B-B



A-A

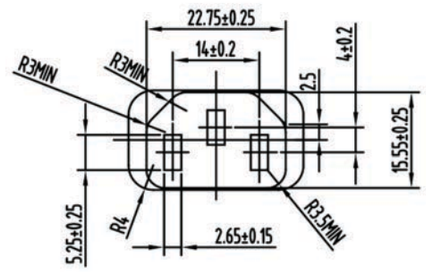

Notes;

1.Plug: JT-SZ3 10A 250V~ Clear injuection, no scrath and dirt
2.Cable:H05VV-F 3X1.0 mm² Jacket φ6.8±0.1 Conductor32×0.2,
Core φ2.6±0.1 φ2.4±0.1
Cable Mark: ⊲VDE⊳ H05VV-F 3X1.0mm²
3.Test: Hi-Pot : Inner Voltage AC2500V/1S、External Voltage AC6000V/1S、current leakage 1mA, insulation resistance no less than 50MΩ, no strike out

Item	Customer Model	Model/No.	Length(mm)	Color
11	CH30	H05VV-F 3G1.0mm2	500±10mm	Black
10	CH29	H05VV-F 3G1.0mm2	300±10mm	Black
9	CH28	H05VV-F 3G1.0mm2	25000±50mm	Black
8	CH27	H05VV-F 3G1.0mm2	20000±50mm	Black
7	CH26	H05VV-F 3G1.0mm2	15000±50mm	Black
6	CH25	H05VV-F 3G1.0mm2	10000±50mm	Black
5	CH24	H05VV-F 3G1.0mm2	7500±50mm	Black
4	CH23	H05VV-F 3G1.0mm2	5000±50mm	Black
3	CH22	H05VV-F 3G1.0mm2	3000±30mm	Black
2	CH21	H05VV-F 3G1.0mm2	1800±15mm	Black
1	CH20	H05VV-F 3G1.0mm2	1000±10mm	Black

P.N		Item	JT-SZ3/JT-ST3	Drw.N	JT-YP-03135
Dre By	Ni Shaojian			Date	
Check By		.x±0.15 .x'±0.15 .xx±0.25 .xx'±0.25 .xxx±0.38 .xxx'±0.38	1 : 1		mm