


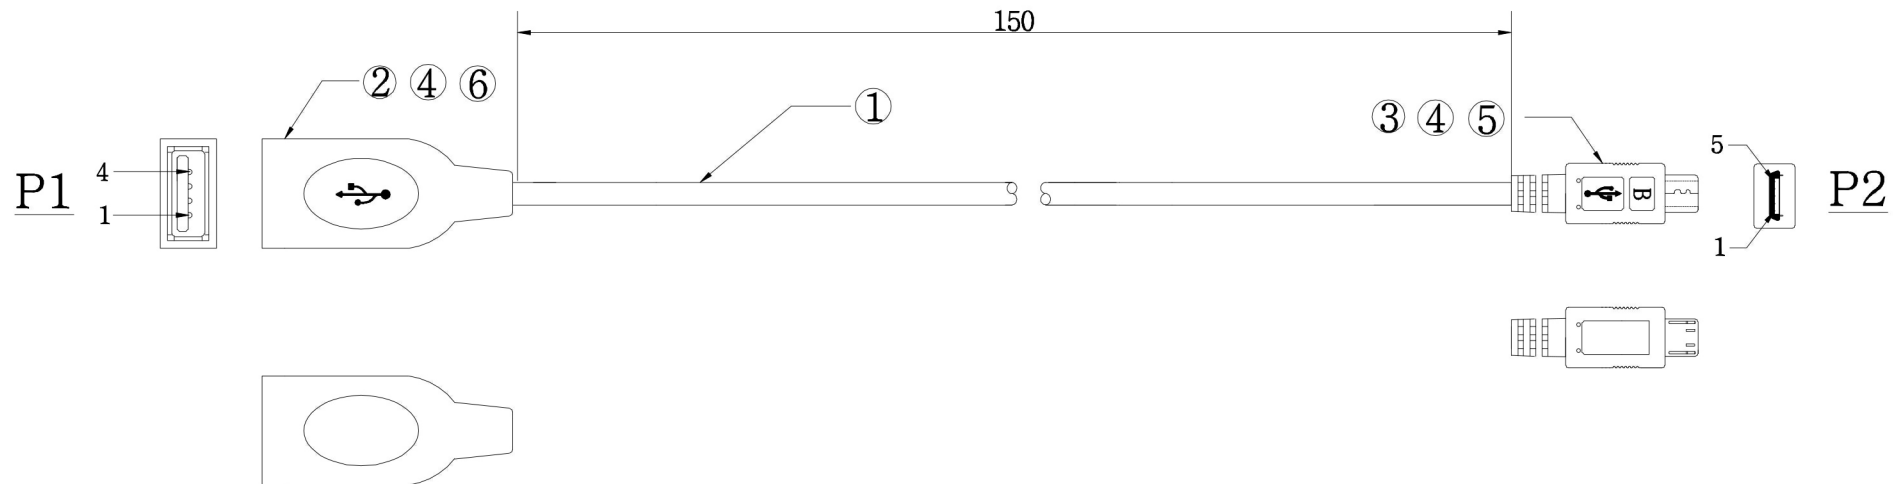

PIN OUT	
P2	P1
1 Red	1
2 White	2
3 Green	3
4 Black	4
5	5
SHELL GND	SHELL

NOTE:

- TEST:100% OPEN, SHORT AND MISS WIRE TEST.
CONDUCTOR RESISTANCE:3 OHMS MAX.
INSULATION RESISTANCE:5M OHMS MIN
HI-POT:DC 300V AT 0.01S

	TOLERANCE	
	INCHES	M/M
	. X	. 015 . 30
	. XX	. 010 . 10
. XXX	. 005	. 05

BUY ON
www.cablematic.com

Model name :

Micro USB Male to A Female OTG Cable

NO.	Name	DESCRIPTION	QTY	UNIT	Drawn by	YDF	Scale	NONE	Model	GC-MB2AF	REV.	A
4	PVC	PVC 45P Black	15	G	Check by		Unit	MM	Drawing no		1 / 1	
3	CONN	Micro 5P	1	PCS	Appd by		Date	2015.09.09	Customer P/N:			
2	CONN	USB2.0 A/F	1	PCS								
1	Cable	UL2725# 28AWG*1P+28#AWG*2C+AEB(48/0.10TS) OD=3.8MM BLACK	1	PCS								