

Introduction

Is a ultra compact chassis with 15" depth ,max 3*5.25+4x3.5" HDD space for wide range application Support

ATX PS2 powersupply for regular server

Features and Benefits

- ▶ Totally 4 drive bay: 1 x 5.25" CD and 3 x 3.5" HDD bay
- ▶ Rackmount, I/O front-access rackmount and wallmount compatible
- ▶ Dimension: 19" x 3U x 11.81" deep




Easy change to wallmount type

Specification


Dimension (W*H*D)	19"*5.25"*11.8"/ 482*133.3*303 (mm)
Material Construction	Heavy-duty & Rugged steel 1.0mm
M/B Size	12 x 9.6 (ATX, microATX, mini-ITX)
Expansion	4 slots full height rear side ATX
Control & Indicator	1*Power switch +1* Reset switch
	1 x LED(power) +2 x LED(HDD)
	2*2.0 USB
Cooling Fans	2*6cm Fan+5*6cm Fan(option)
DriveBay	1*5.25 "+3*3.5"(internal)
Power Supply	PS-2 ATX powersupply
Sliding rail	18" ball bearing sliding rail (option)
Color	Black / Red / Bule / Green / Silver
Operation Temperature	Up to 50C (122°F)
Operation Humidity (Non-condensing)	Up to 90%
Packing Measurement CBF / CBM	2.0/ 0.06
Packing N.W / G.W	5.5KGS / 6.5KGS

Option: Three-Sections Heavy-Duty Solid Ball-Bearing Sliding Rails


Features: Universal Design to match almost all chassis on market, Heavy-Duty Slide Ball Bearing
Built-in stop-latch, lock chassis in extended position for easy access ,
Simply pressing on the plastic levers on each side and slide your case back into the cabinet
Warranty: 1 Year

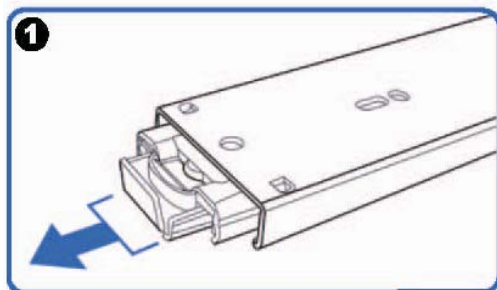


(Pull the center slide all the way out until it reaches the end)




You will see a locking clip at the end point of the center slide. Push it down and unlock the center slide.

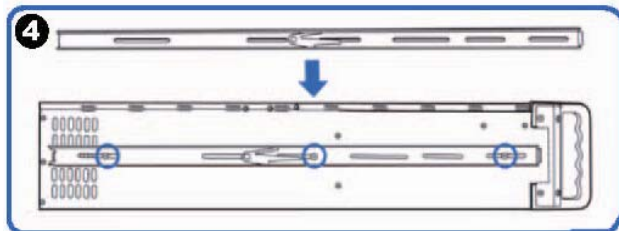


Now put the center slide right next to the rackmount chassis. You should be able to find screw holes on both sides of chassis. Holes are used for mounting the center slide. Later the center slide will be use for attaching the sliding rail.

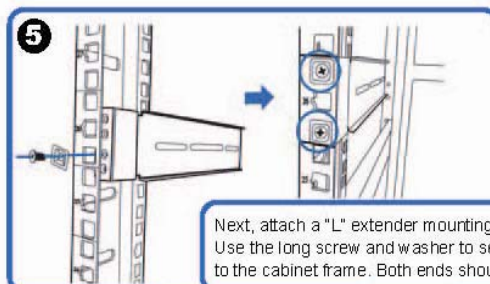


Next, attach a "L" extender mounting bracket on to the cabinet. Use the long screw and washer to secure the "L" extender bracket or to the cabinet frame. Both ends should have the extender bracket.

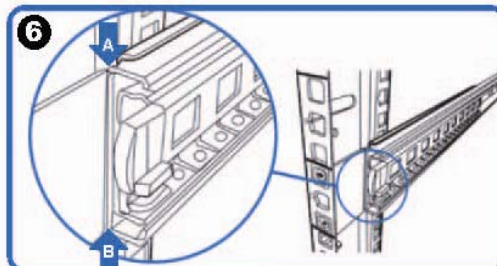


Align front outer rail to the indent of L bracket between Point A & B.

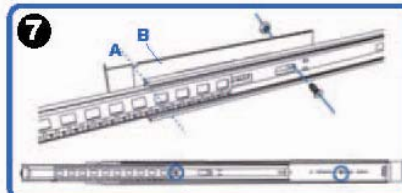

Secure outer rail to L bracket with crews and nuts.



Repeat previous steps to secure sliding rails on both sides.

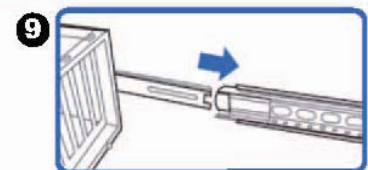

Reattach inner rail back to center rail.