

WEIGHT	CUSTOMER NO:	REMARK
81g-K1	CS22	CABLEMATIC

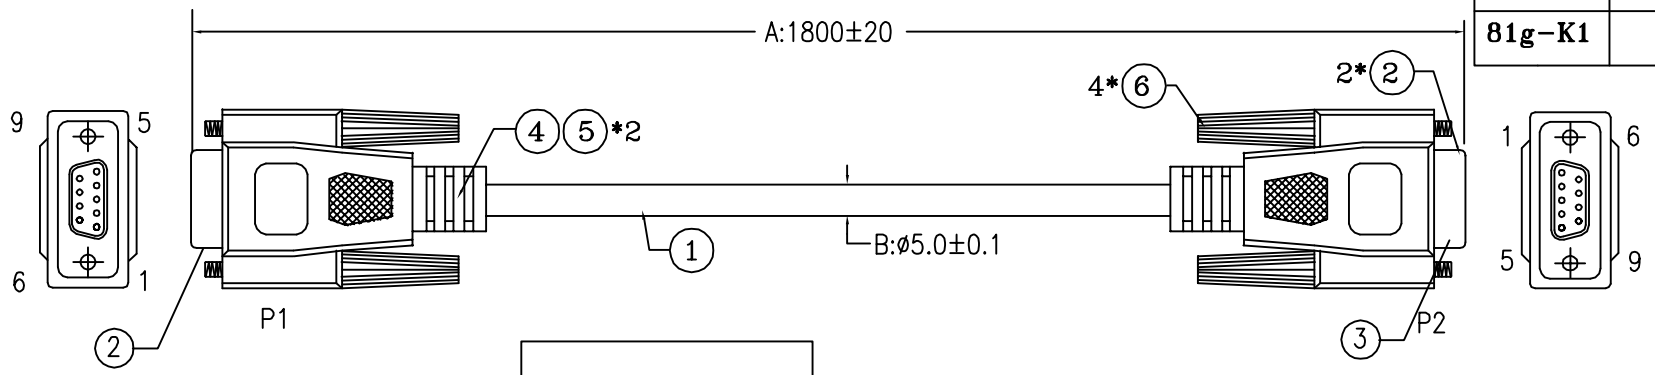

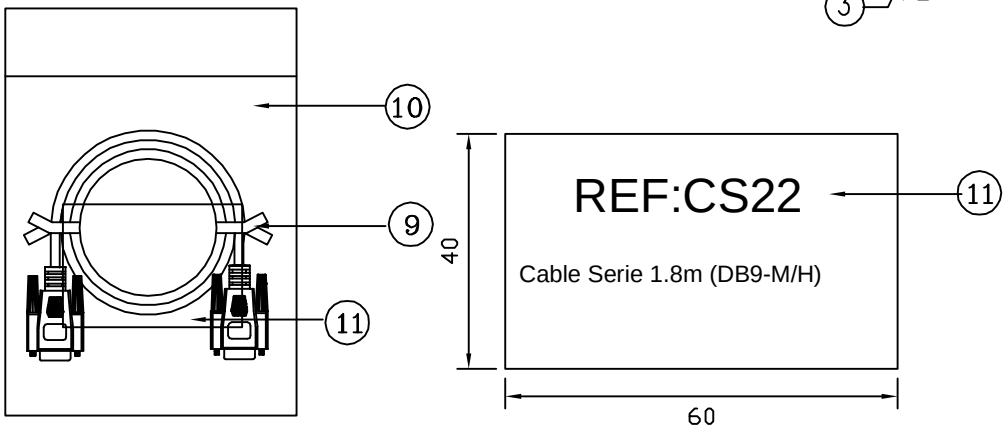

PINOUT:

P1 DB9F		P2 DB9M
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	PURPLE	8
9	GRAY	9
SHELL		SHELL

NOTE:

1) DIE NO:OD09I15(1 OUT OF 2, 5SET) P1 & P2.
2) CORE WIRE COLOR: STANDARD COLOR.
3) PRIMARY DIMENSION: A,E
4) 1PC/PE BAG+LABEL.
5) ROHS COMPLIANT

1	NON UL 30#9C+A+D OD:5.0MM BEIGE(2209) 1800MM(RoHS)	
2	DB9M BLUE SOLDER TYPE BRASS TERMINAL GOLD FLASH(RoHS)	
3	DB9F BLUE SOLDER TYPE BRASS TERMINAL GOLD FLASH(RoHS)	
4	INNER JACKET PE(RoHS)	
5	OUTER JACKET PVC 45Pa BEIGE(2209)(RoHS)	

REV.	ECR	DESCRIPTION	C.N.	DATE
A		FIRST EDITION	WUZAN	23/02/2011

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.

UNLESS OTHERWISE SPECIFIDE:
DIMENSIONS ARE IN MILLIMETERS
ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.10mm
30.01 TO 80.00mm	±0.13mm
80.01 TO 150.00mm	±0.15mm
150.01mm	±0.20mm

MATERIAL
FINISH

TITLE: SERIAL CABLE

CHKD.
CONF.
DR. WUZAN
APPD.
PART NO. 2031-2085
SCALE
SHEET 1/1
UNIT MM
SIZE A4
REV. A